


EXTERIOR STREETS

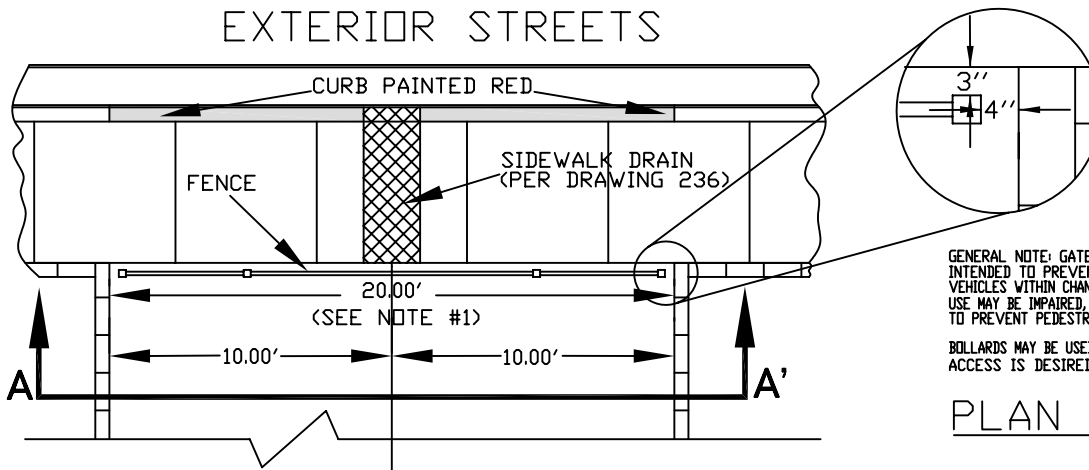


GENERAL NOTE: GATE AND FENCE CONSTRUCTION IS INTENDED TO PREVENT STORAGE OF MATERIALS AND VEHICLES WITHIN CHANNEL. PREVENTION OF PEDESTRIAN USE MAY BE IMPAIRED, BUT THE DESIGN IS NOT INTENDED TO PREVENT PEDESTRIAN TRAFFIC.

BOLLARDS MAY BE USED IN LIEU OF GATE IF PEDESTRIAN ACCESS IS DESIRED.

PLAN VIEW

NOTE #1: 20' STANDARD WIDTH, DIFFERENT WIDTHS TO BE DESIGNED ACCORDINGLY.




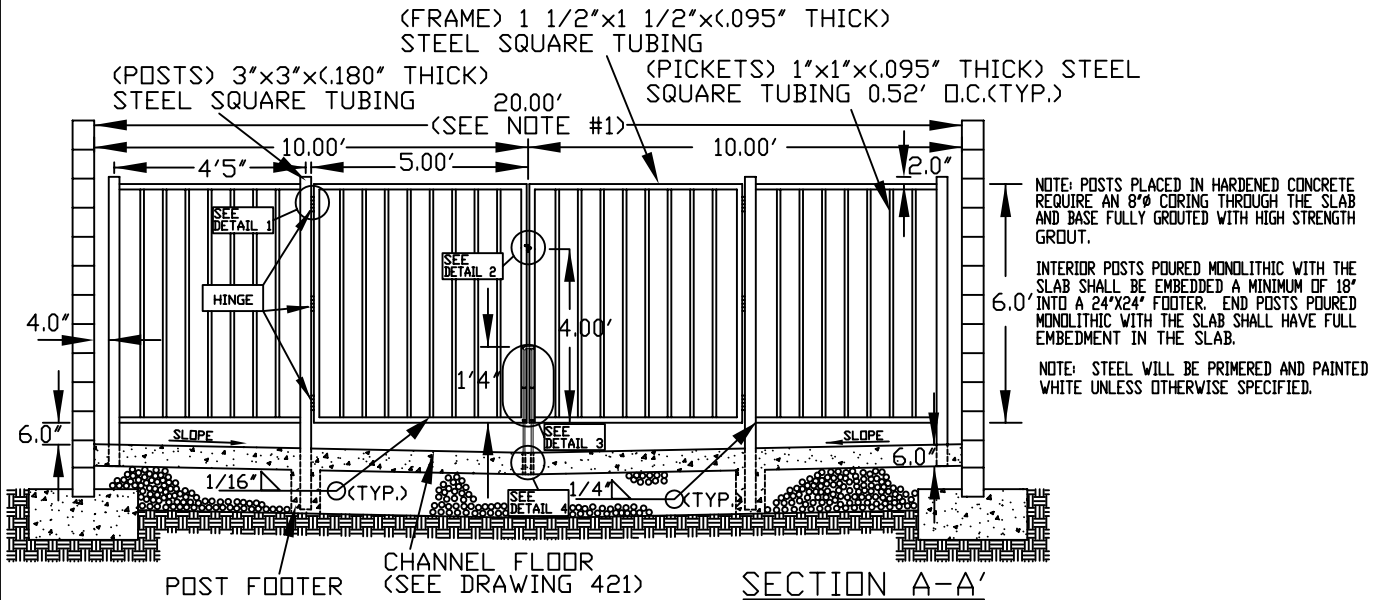


NOTE: POSTS PLACED IN HARDENED CONCRETE REQUIRE AN 8" Ø CORING THROUGH THE SLAB AND BASE FULLY GROUTED WITH HIGH STRENGTH GROUT.

INTERIOR POSTS POURED MONOLITHIC WITH THE SLAB SHALL BE EMBEDDED A MINIMUM OF 18" INTO A 24"x24" FOOTER. END POSTS POURED MONOLITHIC WITH THE SLAB SHALL HAVE FULL EMBEDMENT IN THE SLAB.

NOTE: STEEL WILL BE PRIMED AND PAINTED WHITE UNLESS OTHERWISE SPECIFIED.

SECTION A-A'

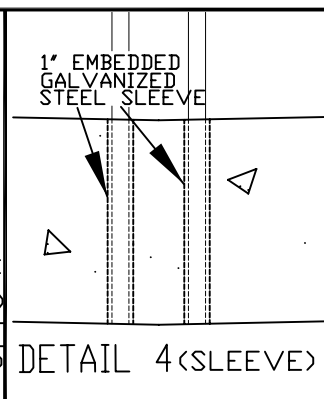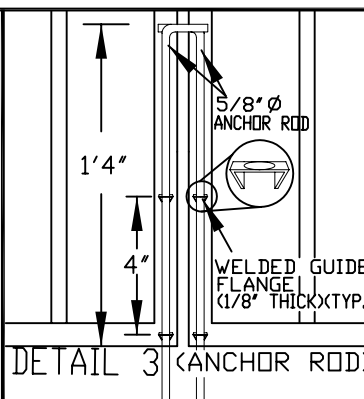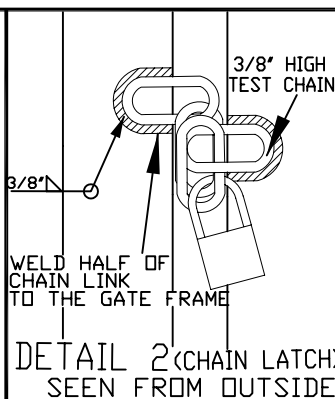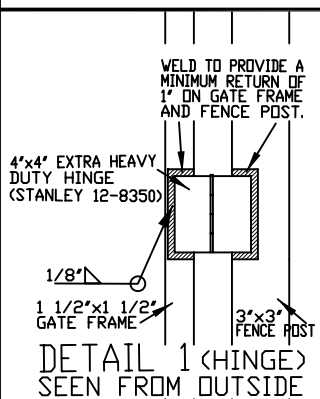

SPECIFICATION REFERENCE

UNIFORM STANDARD DRAWINGS CLARK COUNTY AREA

CITY OF LAS VEGAS ONLY
THRU-LOT DRAIN
(DETAIL FOR FENCE)
NOT FOR USE IN EMERGENCY ACCESS

DATE 03-07-02 DWG. NO. 421 B PAGE NO. 120 C